

SJIII SERIES

MODEL	WORK HEIGHT	Raised Platform Height	Lowered Platform Height	O/A Width	O/A Length	Stowed Height Railings Up	Stowed Height Railings Down	% Gradeability Ω	CAPACITY kg Σ	# OF PERSONS	PLATFORM SIZE (Inside Dimension)	TRAVEL SPEED km/h	LIFT TIME (sec) †	WEIGHT kg Σ
-------	-------------	------------------------	-------------------------	-----------	------------	---------------------------	-----------------------------	------------------	---------------	--------------	----------------------------------	-------------------	-------------------	-------------

C O M P A C T S														
3215	6.4m	4.6m	0.88m	0.81m	1.78m	1.99m	1.63m OPT	23%	227kg	2	0.66 x 1.57m	3.2km/h	23	1090kg
3219	7.6m	5.8m	0.99m	0.81m	1.78m	2.11m	1.75m OPT	23%	227kg	2	0.66 x 1.57m	3.2km/h	25	1170kg

C O N V E N T I O N A L S														
3220	7.9m	6.1m	0.97m	0.84m	2.32m	2.08m	1.72m OPT	25%	408kg	2	0.71 x 2.13m	3.2km/h	33	1583kg
3226	9.7m	7.9m	1.15m	0.84m	2.32m	2.27m	1.94m	25%	227kg	2	0.71 x 2.13m	3.2km/h	56	1864kg
4620	7.9m	6.1m	0.97m	1.17m	2.31m	1.96m	1.71m OPT	25%	590kg	3	1.07 x 2.11m	3.2km/h	33	1860kg
4626	9.7m	7.9m	1.14m	1.17m	2.31m	2.15m	1.87m	25%	454kg	3	1.07 x 2.11m	3.2km/h	55	2130kg
4632	11.6m	9.7m	1.23m	1.17m	2.31m	2.24m	1.96m	25%	318kg	2	1.07 x 2.11m	3.2km/h	59	2300kg
6826	9.7m	7.9m	1.27m	1.73m	2.52m	2.37m	1.99m	25%	454kg	3	1.53 x 2.05m	3.2km/h	65	2440kg
6832	11.6m	9.7m	1.4m	1.73m	2.52m	2.51m	2.13m	25%	454kg	3	1.53 x 2.05m	3.2km/h	60	2700kg

M E T R I C S														
3220	7.9m	6.1m	0.97m	0.84m	2.32m	2.08m	1.75m	25%	408kg	2	0.71 x 2.13m	3.2km/h	33	1583kg
3226	9.7m	7.9m	1.15m	0.84m	2.32m	2.27m	1.94m	25%	227kg	2	0.71 x 2.13m	3.2km/h	56	1864kg

† Lift times with rated load
 Ω Gradeability calculated with 1 operator capacity
 Σ Some capacities are reduced and overall machine weights increased when equipped with deck extensions - consult factory for details.

Models	Compacts		Conventionals						Metrics	
	3215	3219	3220	3226	4620	4626	4632	6826	6832	3220

S T A N D A R D E Q U I P M E N T											
Driveable at Full Height	•	•	•	•	•	•	•	•	•	•	•
Dual Parking Brakes	•	•	•	•	•	•	•	•	•	•	•
Universal Battery Charger	•	•	•	•	•	•	•	•	•	•	•
Color Coded and Numbered Wiring System	•	•	•	•	•	•	•	•	•	•	•
Foam Filled Tires	•	•	•	•	•	•	•	•	•	•	•
Solid Rubber, Non-Marking Tires	•	•	•	•	•	•	•	•	•	•	•
0.9m Roll Out Deck Extension	•	•	•	•	•	•	•	•	•	•	•
Swing Out Trays, for easy access	•	•	•	•	•	•	•	•	•	•	•
Joystick Proportional Control for Drive/Lift	•	•	•	•	•	•	•	•	•	•	•
Tilt Alarm with Drive/Lift Cut Out	•	•	•	•	•	•	•	•	•	•	•
Wiring for AC Outlet	•	•	•	•	•	•	•	•	•	•	•
Lanyard Attachments Points	•	•	•	•	•	•	•	•	•	•	•
Rigid Steel Scissor Guards	•	•	•	•	•	•	•	•	•	•	•
Hinged Railing System	•	•	•	•	•	•	•	•	•	•	•
Lowering Warning System	•	•	•	•	•	•	•	•	•	•	•
Overload Sensing System	•	•	•	•	•	•	•	•	•	•	•
Forklift Pockets/Tie Downs/Lifting Lugs	•	•	•	•	•	•	•	•	•	•	•
Pathole Protection	•	•	•	•	•	•	•	•	•	•	•
Operator Horn	•	•	•	•	•	•	•	•	•	•	•
DC Power (V DC)	24	24	24	24	24	24	24	24	24	24	24
Base Controls	•	•	•	•	•	•	•	•	•	•	•
Spring Loaded Half Height Gate	•	•	•	•	•	•	•	•	•	•	•

O P T I O N A L E Q U I P M E N T											
Spring Loaded Full Gate entry	•	•	•	•	•	•	•	•	•	•	•
1.8m Power Deck Extension	•	•	•	•	•	•	•	•	•	•	•
1.5m Power Deck Extension	•	•	•	•	•	•	•	•	•	•	•
Flashing Light	•	•	•	•	•	•	•	•	•	•	•
Hinged Railing System	•	•	•	•	•	•	•	•	•	•	•
Shop Air Line Air to Platform	•	•	•	•	•	•	•	•	•	•	•
Non-marking Foam Filled Tires	•	•	•	•	•	•	•	•	•	•	•
All Motion Alarm	•	•	•	•	•	•	•	•	•	•	•
Rigid Steel Scissor Guards	•	•	•	•	•	•	•	•	•	•	•

The best scissor lifts in the world continue to get better.

Since its inception in 1986, Skyjack has become a global leader in the manufacturing of scissor lift work platforms. During the 90s the company grew to capture over 30% market share and remains an internationally dominant force.

In September 2002, Skyjack was purchased by Linamar Corporation (LNR, TSX) - a leading manufacturer in the automotive industry of precision-machined components, assemblies and modules. Linamar's solid balance sheet gives Skyjack increased strength and long-term stability.

Skyjack products range in working heights from 6.4 - 11.6 meters in both electric on-slab applications and internal combustion powered rough terrain models. All Skyjacks are backed up by a comprehensive, international product support network.

Reliability, quality, service... these are the hallmarks of Skyjack. The proven commitment to excellence that has become synonymous with the Skyjack brand will continue to propel the company toward even greater success in the future.

Skyjack has manufacturing, sales and product support facilities located throughout the world. Skyjack also offers leasing, trade-in and rental/purchase programs. Call us or visit our website for more information.

This literature is for illustrative purposes only. Consult the Operating Maintenance and Parts Manual for proper procedures. Work platforms have been tested to comply with CE standards as interpreted by Skyjack, Inc. Specifications are subject to change without notice.



Skyjack Europe Sales
 Glovers Meadow
 Maesbury Road Industrial Estate
 Oswestry
 Shropshire, SY10 8NH


Tel: +44 (0) 1691-676235
 Fax: +44 (0) 1691-676239
 E-mail: mdavies@skyjackeurope.co.uk

Skyjack Europe Parts and Service
 Communicatieweg 29
 Mijdrecht, SG 3641
 The Netherlands

Tel: +31 297 255 526
 Fax: +31 297 256 071
 E-mail: info@skyjackeurope.nl

www.skyjackinc.com

Distributed by:



0704 - 20M PRINTED IN CANADA

SJIII SERIES

COMPACTS & CONVENTIONALS
 CE




CE SPECIFICATIONS

STANDARD/OPTIONAL EQUIPMENT

SJIII SERIES

COMPACTS

The Compacts provide exceptional versatility for those tight spots where agility and maneuverability make all the difference. With work heights up to 7,6m, up to a 227kg capacity and 23% gradeability, the SJIII Compacts offer big performance in small spaces.

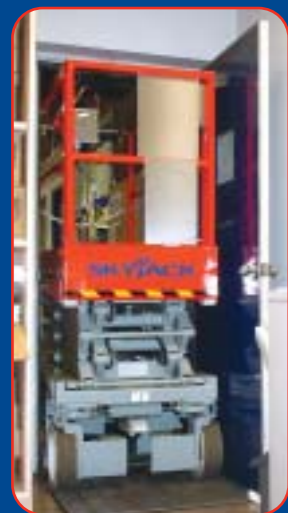

Overall Compact dimensions permit access through standard doorways.



Model: SJIII 3219

Both Compact models feature variable speed front wheel hydraulic drive.

When space is limited, SJIII Compacts have 90° steering which gives them the ability to negotiate and maneuver in tight spaces.



Charger at rear of base offers unrestricted access

SJIII SERIES

STANDARD FEATURES

Superior scissor design provides rigidity and operator comfort



Joystick proportional control for drive/lift functions



Swing-out trays and color coded wiring for superior serviceability



Spring-loaded half height gate entry



Standard rollout extension decks



Forklift pockets, tie downs and lifting lugs



NEW NARROW DESIGN

Model: SJIII 4632

6826/32 models feature foam filled tires. (Non-marking optional)



Safety is the primary consideration on any job. The SJIII pothole protection feature offers operators maximum performance and safety (pothole protection not available on 6826/32 models).



SJIII SERIES

CONVENTIONALS

The Conventionals offer high capacity, large platform areas, battery power and joystick proportional control for drive/lift functions. With working heights up to 11,6m, 25% gradeability and load capacities up to 590kg, Conventionals are suitable for any on-slab application.



Model: SJIII 6832



SJIII Conventionals feature variable speed rear wheel hydraulic drive.